

HCI905FTB4, HCI905FTG4, HCI604FTB4, HCI604FTG4

Induction Cooktop, 90 and 60cm, With Flexi Zone, Connected



HCI905FTB4



HCI604FTB4

[HCI905FTB4, HCI905FTG4](#)

H 60mm W 900mm D 520mm

Weight packaged

16.5kg

Weight product

14kg

[HCI905FTB4, HCI905FTG4](#)



HCI905FTB4



HCI604FTG4

H 60mm W 590mm D 520mm

Weight packaged

10kg

Weight product

8.5kg


FEATURES

- Sleek black glass finish or versatile mid grey glass finish to suit a range of kitchen designs
- Four (HCI604FTB4, HCI604FTG4), or five (HCI905FTB4, HCI905FTG4) cook zones with precise heat control
- Linked hood to hob connection, pairing rangehood extraction with the cook zone power levels via Bluetooth
- With FlexiZone, pair two cook zones to make a large cook surface
- Intuitive touch slider controls for each zone
- Energy-efficient induction technology
- Surface remains cool-to-touch until cookware is placed on it
- Instant-response heating for busy lives
- Wi-Fi enabled for easy control using the SmartHQ™ app
- Designed to pair with a Haier oven in matching black or grey

The models shown in this Specification Guide (SG) may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This SG should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available with the product on delivery and on our website haier.com


Product Overview

PRODUCT DIMENSIONS

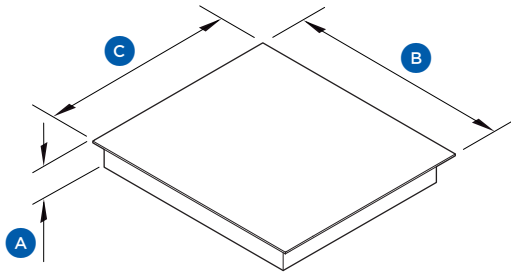

		mm
A	Overall height	60
B	Overall width	590
C	Overall depth	520

CUTOUT DIMENSIONS

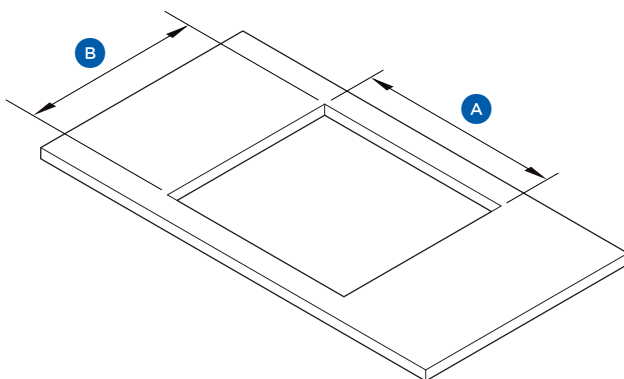


		mm
A	Overall width of cutout	562
B	Overall depth of cutout	492

SERVICES

- Supply 220-240 V, 50 Hz
- Service 31 A
- Connection Hard wired


Product Overview

PRODUCT DIMENSIONS

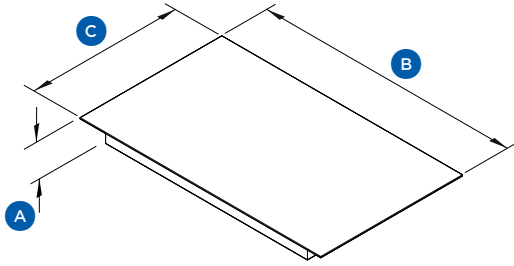

		mm
A	Overall height	60
B	Overall width	900
C	Overall depth	520

CUTOUT DIMENSIONS

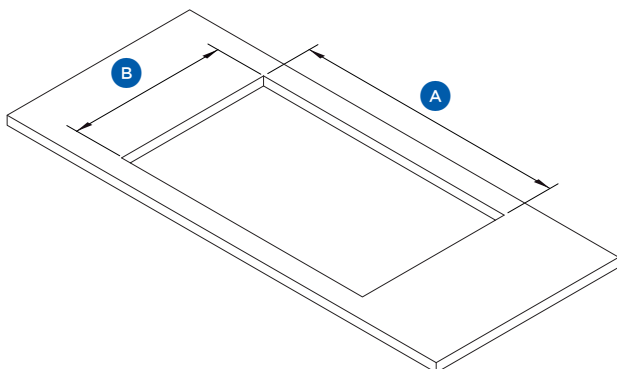

		mm
A	Overall width of cutout	870
B	Overall depth of cutout	490

SERVICES

- Supply 220-240 V, 50 Hz
- Service 32 A
- Connection Hard wired